





WE CARE CHEMISTRY

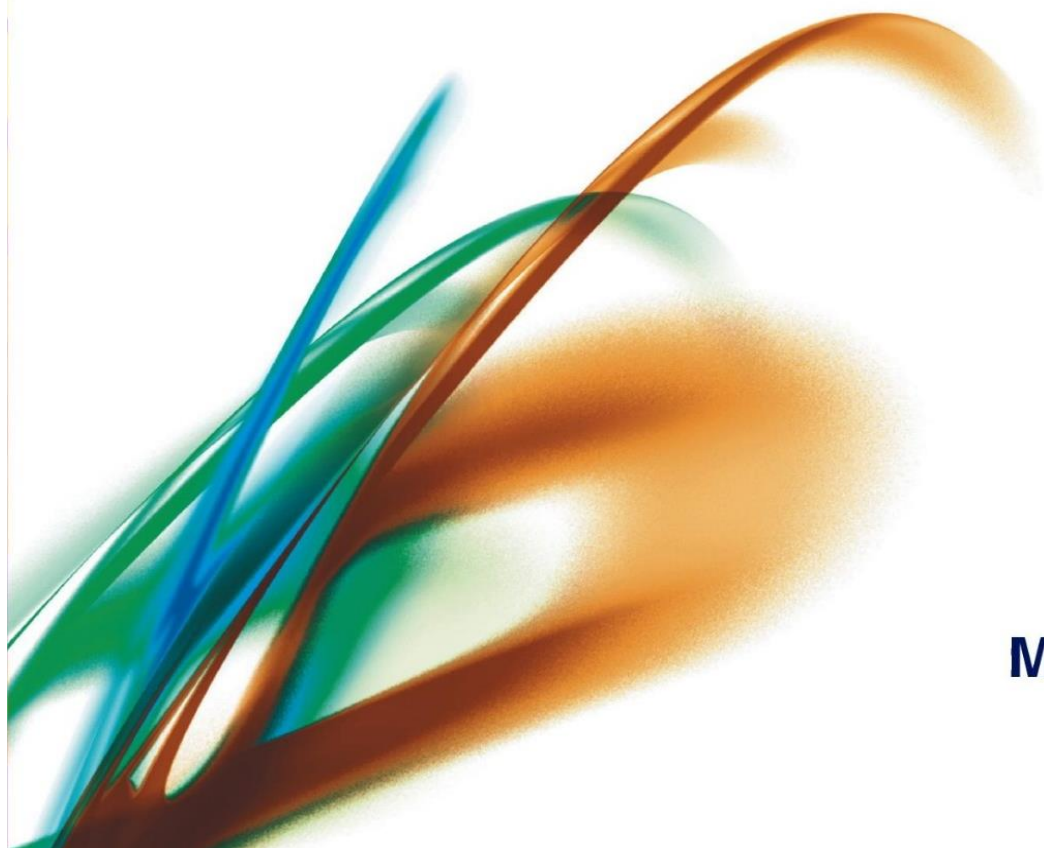

MULTI RESIN INDUSTRIES

PRODUCT CATALOGUE

**MULTI
RESIN
INDUSTRIES**

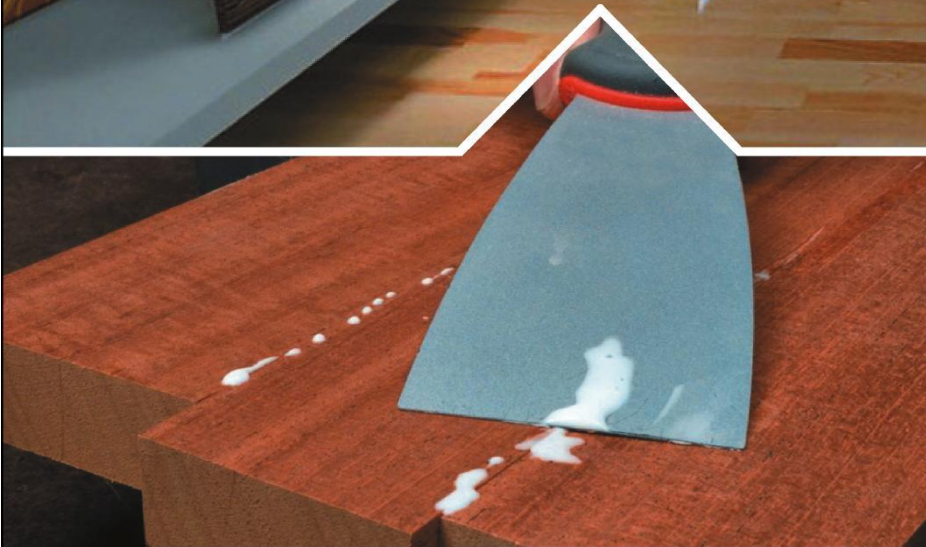

WOOD

**WOOD
GRADE**



WATER BASED ADHESIVES

Product Code	Physical Appearance	Nature of Chemical	Approx Density 20/25 °C	NVM%	pH	Viscosity *cps spindle#/rpm 2/3	Film	Application
Multiteck 270 SPH	M/W Thick Liquid	An ionic / non-ionic PVAc emulsion	1.197	40 ± 1	4.5-5.0	3500-45000	Clear & tacky	This is our superior quality product for wood adhesive, paper & packaging, door pressing, formica pressing with high viscosity and lowest volume consumption to get extra ordinary result & most economical in cost.
Multiteck 270 SP	M/W Thick Liquid	An ionic / non-ionic PVAc emulsion	1.05	39 ± 1	4.5-5.0	25000-35000	Clear & tacky	This is our superior quality product for wood, paper & packaging, door pressing, formica pressing, paper cone making etc
Multiteck 270 FHV	M/W Thick Liquid	An ionic / non-ionic PVAc emulsion	1.05	36 ± 1	4.5-5.0	35000-40000	Clear & tacky	It is used for Wood, paper & Packaging, home furniture, joint pressing in all applicants with best results adhesive emulsion.
Multiteck 270 M	M/W Thick Liquid	An ionic / non-ionic PVAc emulsion	1.05	34 ± 1	4.5-5.0	40000-50000	Clear & tacky	It is used for wood, paper & Packaging, formica pressing, carton making very economical cost as well.
Multiteck VML	M/W Thick Liquid	An ionic / non-ionic PVAc emulsion	1.05	30 ± 1	4.5-5.0	30000-35000	Clear & non-tacky	It is used for Wood, paper & Packaging, home furniture, joint pressing to get effective results & suitable adhesive emulsion etc.
Multiteck Linker	M/W Thick Liquid	An ionic / non-ionic PVAc emulsion	1.05	24 ± 1	4.5-5.0	30000-35000	Clear & non-tacky	It is used for Wood, paper & Packaging, home furniture, joint fixing good result & cost wise most economical adhesive as well.
Multiteck LCN	M/W Thick Liquid	An ionic / non-ionic PVAc emulsion	1.06	20 ± 1	4.5-5.0	25000-30000	Clear & non-tacky	It is used for Wood, paper & Packaging, home furniture low cost economical adhesive etc.
Multibond Plus	M/W Thick Liquid	An ionic / non-ionic PVAc emulsion	1.05	50 ± 1	4.0-5.0	3500-4500	Clear, tacky tacky, smooth & flexible	PVAc used in high quality panel doors, Flush doors like Diyar wood, beech wood, Basmateck panelling special recommended for American kitchen, French & Italian kitchen, fabrication etc.
Multibond	M/W Thick Liquid	An ionic / non-ionic PVAc emulsion	1.05	45 ± 1	4.0-5.0	3500-4300	Clear, tacky tacky, smooth & flexible	PVAc used in high quality panel doors, Flush doors like Diyar wood, beech wood, Basmateck panelling special recommended for American kitchen, French & Italian kitchen, fabrication etc.

MULTI RESIN INDUSTRIES

HEAD OFFICE & FACTORY:

Plot # F-9/A, S.I.T.E.,
Hyderabad.

P: +92-22-3881153

F: +92-22-3400126

LIAISON OFFICES

KARACHI:

Suites # C-3 & C-7

Islamic Arcade

Opposite Safari Park

Main University Road

UAN: +92-21-111-674-007

P: +92-21-34979172, 34802479

+92-21-34835567, 34835568

F: +92-21-34802479

C: +92-321-2489786

LAHORE:

425, Gulshan Block

Allama Iqbal Town

P: +92-42-37806632

C: +92-321-2435634

FAISALABAD:

P 8/29, Ravi Market

2nd Floor, Susan Road

P: +92-41-8555135

C: +92-321-2435444



WE CARE CHEMISTRY

marketing@multiresin.com

<http://multiresin.com>